

ZEITRAUM

OKITO TABLE

Design by Läufer & Keichel, 2018



Furniture Footprint

OKITO TABLE

Design by Läufer & Keichel, 2018

OKITO TABLE – the successful combination of solid wood and tubular steel frame. The lightweight table is completely dismantled into its individual parts: the singular tubular steel legs are bolted form-closed and flush to the underside of the table top by iron head plates.

ZEITRAUM furniture meets the highest quality and environmental standards and is primarily made of solid wood. All the materials we use come from responsible manufacturing and are for the most part sourced directly from Germany. The following describes the product: OKITO TABLE. Due to the proportion of renewable raw materials, among other things, ZEITRAUM products can contribute to a good rating in certification programmes for sustainable buildings, such as LEED. For more information, please do not hesitate to contact us at any time.

Product details (70 x 70, h 75)

Product category	Table			
Weight	ca. 14 kg			

Environmental details

Recycled content/ renewable raw materials	ca. 18,5 % recycled material (steel, share: 37 %, ø 50 % recycled content) ca. 62,6 % renewable materials
Recyclability	ca. 62,7 % wood (waste wood category 2) ca. 37 % steel
Repairability	Due to the modular construction and the use of solid wood, the furniture can be repaired and refurbished almost indefinitely. We will be happy to assist with spare parts and service where necessary and possible.

Manufacturing details

Furniture element	Production site	Production partner since	Visited by ZEITRAUM	Code of Conduct signed
Top	Bavaria, Germany	1998	Yes	Yes
Metal legs	Bavaria, Germany	2018	Yes	Yes




Packaging

Flatpack	Yes
----------	-----



Warehouse

Country	Federal state
Germany	Bavaria

OKITO TABLE, 70x70, h 75; oak

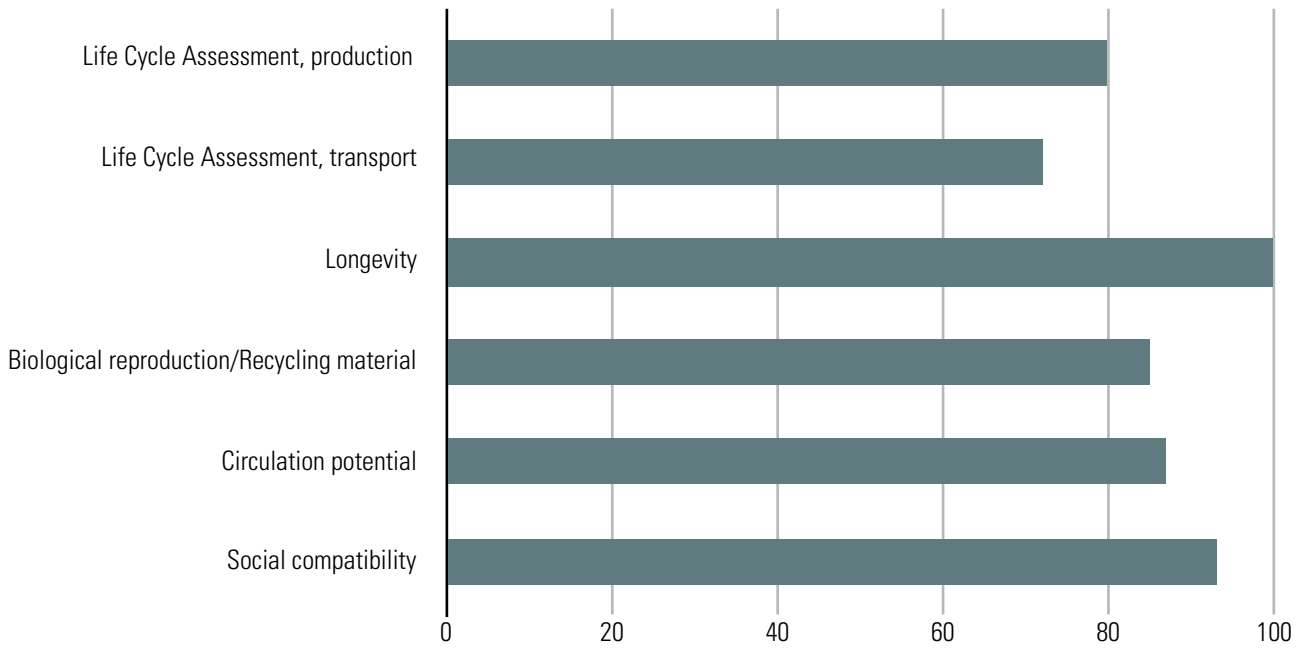

- wood/wood based material
- steel
- PA
- natural oil
- PVAC adhesive

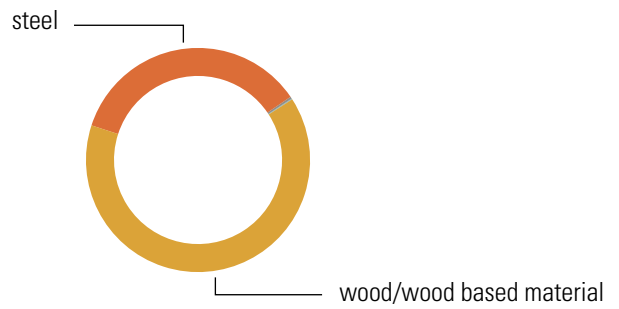


▬ Flat pack

OKITO TABLE, 70x70, h 75; oak	Material/Product rating					
	Oak	Steel	Plastic, PA	Natural oil, Osmo	PVAC	Weighted rating, %
Life Cycle Assessment, production	10	4,3	3	5	10	79,5235 %
Life Cycle Assessment, transport	9	4	6,5	9	6,5	72,167 %
Longevity	10	10	8	10	9	99,914 %
Biological reproduction/ Recycling material	10	6	0	6	0	85,408 %
Circulation potential	8	10	10	10	4	87,126 %
Social compatibility	10	8	9	10	9	92,854 %
Average rating, $\bar{\sigma}$	9,5	7,05	6,083	8,333	6,416	Total weight
Share in kg	9,4	5,2	0,044	0,012	0,009	14,665
Share in %	64,09 %	35,45 %	0,3 %	0,08 %	0,06 %	
Weighted rating	6,088	2,499	0,018	0,006	0,003	
Product rating in %	86,14					

Packaging	Material/Product rating			
	Cardboard	PE fleece	PP strapping	Weighted rating, %
Life Cycle Assessment, production	10	3	5	93,617 %
Life Cycle Assessment, transport	9	6,5	6,5	87,6495 %
Longevity	4	5	5	40,925 %
Biological reproduction/Recycling material	6	0	0	54,39 %
Circulation potential	10	10	10	99,98 %
Social compatibility	10	9	10	99,131 %
Average rating, $\bar{\sigma}$	8,166	5,583	6,083	Total weight
Share in kg	3,2	0,3	0,03	3,53
Share in %	90,65 %	8,49 %	0,84 %	
Weighted rating	7,402	0,473	0,051	
Product rating in %	79,26			



1 Oak

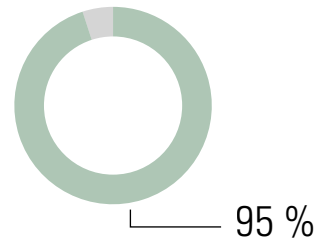

Tab. 1 A: Material data sheet, oak, general¹²

Material group	Natural material; wood; hardwood
Botanical name	<i>Quercus robur L./Q. patrea Liebl. (Fagaceae)</i>
Name	European Oak (GB, US); Eiche (D), Sommereiche (D); Chêne (F)
Material Norm. Ref.	DIN EN 13556: QCXE
Origin	Germany, (Central Europe)
Occurrence	Europe to Asia Minor; North America; most common European occurrence in France
Use	Solid and veneer, mainly sliced veneer; furniture and interior fittings; paneling and parquet; structural timber, etc.

¹ WAGENFUEHR, R. (2007) - Wood Atlas. (6) Leipzig: Hanser Wirtschaft, Fachbuchverlag Leipzig, pp. 255-277

² LOHMANN, U. (2010) - Wood encyclopedia. The standard work for wood and forestry. (4) Hamburg: Nikol-Verlag, pp. 284-285

Tab. 1 B: Material data sheet, oak, specific³

General description

Certifications/Information	FSC and PEFC on request	
Life cycle assessment data hardwood, average (GER)		10
Resource input per kg	A1-A3	
Total non-renewable primary energy (PENRT)	2,18 MJ	10
Use of freshwater resources (FW)	0,00048 m ³	10
Environmental impact per m³		
Global Warming Potential (GWP)	-1,74 Kg CO ₂ -eqv.	10
Environmental impact Transport, per 1000 kgkm (690 kg/m³)		9
Production site: Germany/ZEITRAUM		
Truck - ca. 300 km	A4	10
Total non-renewable primary energy (PENRT)	362,4 MJ	
Use of freshwater resources (FW)	0,019164 m ³	
Global Warming Potential (GWP)	26,907 Kg CO ₂ -eqv.	
Main raw material origin: Germany, Central Europe/Production site		
Truck - ca. 1500 km	A4	8
Total non-renewable primary energy (PENRT)	1812 MJ	
Use of freshwater resources (FW)	0,09582 m ³	
Global Warming Potential (GWP)	134,535 Kg CO ₂ -eqv.	
Sustainability Assessment		
Longevity	Very durable/repairable (> 20 years)	10
Biological reproduction/ recycled material	100 %	10
Circulation potential	70 % - 99 % (technological/recycling)	8
Socially compatible	Yes	10
Total average rating		9,5
Processing		
Mechanical	Good; can be cut and peeled, suitable for turning and carving; pre-drill thin wood for nailing	
Drying	Moderately good; slow; tendency to tear and warp; predrying outdoors favorable; good durability	

³ BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

Adhesion	Good; alkalis can cause stains	
Surface finishing	Good; can be stained and varnished, if necessary use pore filler when varnishing; tinting of wood color by smoking	
Natural durability DIN EN 350-2	durable; sapwood low; heartwood durable; also in water; durability class 2	

Physical properties


Kiln density (0 % wood moisture content)	390... 650... 930 kg/m ³	
Bulk density (12 - 15 % wood moisture)	430... 690... 960 kg/m ³	
Pore ratio	ca. 57 %	
Shrinkage rate at 1 % moisture reduction	radial - 0,20 %; tangential - 0,32 %; volume - 0,45 %	

Mechanical properties

Compressive strength (σ_{dB})	Q. robur: 54... 61... 67 N/mm ² Q. petraea: 48... 65... 70 N/mm ²	
Flexural strength (σ_{bB})	Q. robur: 74... 88... 105 N/mm ² Q. petraea: 78... 110... 117 N/mm ²	
Tensile strength ($\sigma_{zB} $)	50... 90... 180 N/mm ²	
Tensile strength ($\sigma_{zB} \perp$)	2,6... 4,0... 9,6 N/mm ²	
Shear strength (τ_{aB})	6,0... 11,0... 13,0 N/mm ²	
Hardness (HB)	50... 66 N/mm ²	
Hardness (HB \perp)	25... 34 N/mm ²	
E-modulus ($E_b $)	Q. robur: 10000... 11700... 13200 N/mm ² Q. petraea: 9200... 13000... 13500 N/mm ²	



2 Steel

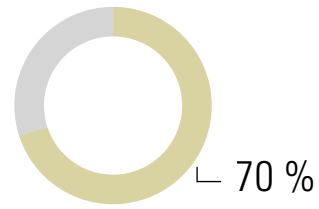

Tab. 2 A: Material data sheet, steel, general⁴

Material group	Natural material; metals; transition metals
Parts origin	Italy and Turkey
Occurrence	Worldwide; South America, Western Australia, China and Eastern Europe, Canada
Use	According to application: building structural and tool steel, structural steel for machinery, vehicle and shipbuilding or mechanical engineering; line pipe, pressure vessel, etc.; handicraft and design; furniture making

⁴ KALWEIT, A., a.o. (2012) - Handbook of Technical Product Design, Materials and Manufacturing - Decision Bases for Designers and Engineers (2) Berlin: Springer-Verlag Berlin Heidelberg GmbH

Tab. 2 B: Material data sheet, steel, specific⁵⁶

General description

Certifications/Information	ISO 14001, ISO 9001	
Emission class (formaldehyde)	Formaldehyde free	
Surface	smooth, hard	
Color	Grey	
Life cycle assessment data Steel profile, powder-coated (GER)		4,33
Resource input per kg	A1-A3	
Total non-renewable primary energy (PENRT)	12,49 MJ	2
Use of freshwater resources (FW)	0,0026 m ³	4
Environmental impact per kg	A1-A3	
Global Warming Potential (GWP)	1,09 Kg CO ₂ -eqv.	7
Environmental impact Transport, per 1000 kgkm (7850 kg/m³)		4
Production site: Italy, Turkey/ZEITRAUM		
Truck ø - ca. 1500 km	A4	8
Total non-renewable primary energy (PENRT)	1812 MJ	
Use of freshwater resources (FW)	0,09582 m ³	
Global Warming Potential (GWP)	134 Kg CO ₂ -eqv.	
Main raw material origin: China/production location		0
Truck - ca. 2000 km	A4	
Total non-renewable primary energy (PENRT)	2416 MJ	
Use of freshwater resources (FW)	0,12776 m ³	
Global Warming Potential (GWP)	179,38 Kg CO ₂ -eqv.	
Container ship - ca. 10000 km	A4	
Total non-renewable primary energy (PENRT)	1094 MJ	
Use of freshwater resources (FW)	0,005636 m ³	
Global Warming Potential (GWP)	90,11 Kg CO ₂ -eqv.	

Sustainability Assessment

⁵ BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

⁶ MATERIALARCHIV (2019) - Materialarchiv <<http://www.materialarchiv.ch/app-tablet/#search>> Accessed, on 03/01/2019

Longevity	Very durable/repairable (> 20 years)	10
Biological reproduction/ recycled material	50 - 60 %	6
Circulation potential	100 % (technological)	10
Socially compatible	Yes	8
Total average rating		7,05

Processing

Mechanical	More difficult to machine due to hardness, drilling, turning, milling, cutting; forming (bending, compression, tension forming)	
Joints	Riveting; screwing and welding	
Surface finishing	Engraving, polishing, embossing, grinding, lasering	
Other	High plastic deformability under impact loading; materials with low carbon content are easier to deform	

Durability

Heat resistant, corrosion and heat resistant

Physical properties

Density	7,85 g/cm ³	
Electrical conductivity	9,93*10 ⁶ S/m	
Thermal Abrasiveness	80,2 W/(m*K)	

Mechanical properties mild steel

Yield strength (βs)	185 - 360 N/mm ²	
Tensile strength (βz)	310 - 680 N/mm ²	
Elongation at break	18 - 26 %	
E-modulus (E)	210*10 ³ N/mm ²	
Shear modulus (G)	85*10 ³ N/mm ²	
Poisson's ratio	0,28	

Notes

The life cycle assessment of iron improves the more often the material has been recycled or the proportion of recycled material increases



3 AgriPlast, bioplastic, wood-plastic composite

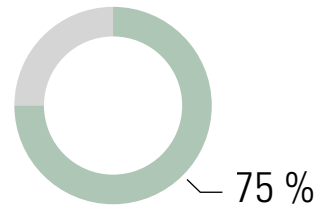


Fig. 3: www.biowert.com

Tab. 3 A: Material data sheet, Agriplast, bioplastic, general⁷

Material group	Natural-Synthetic Material; Plastic; Wood-Plastic Composite Material
Name	Wood-plastic composites; wood-polymer composites (GB, US); Holz-Kunststoff-Verbundwerkstoffe (D)
Short name	WPC (Wood-Plastic-Composites)
Manufactured in	Germany (GER)
Version	It is a plastic-cellulose mixture Available in the usual types for plastic: granules, injection molded parts, etc Cellulose content: 30-70 %
Use	Can be used in almost all areas as a plastic alternative

⁷ KALWEIT A. (2012) - Handbook of technical product design - materials and manufacturing. Berlin: Springer Verlag

Tab. 3 B: Material data sheet, Agriplast, bioplastic, specific⁸⁹

General description Agriplast NFLDPE 5050

Emission class	Formaldehyde-free	
Fire resistance	Fire protection: n.a.	
Color	Brown, mottled; dyed available	
Texture	smooth, mottled, plastic-like to wood-like	
Basic materials/auxiliary materials		
Cellulose	50 % (Predominantly from grasses)	
Polypropylene	50 %	
Life cycle assessment data WPC, decking boards (GER)		7
Resource input per kg	A1-A3	
Total non-renewable primary energy (PENRT)	29,1468 MJ	10
Use of freshwater resources (FW)	4,8809 m ³	0
Environmental impact per kg	A1-A3	
Global Warming Potential (GWP)	0,0138 Kg CO ₂ -eqv.	10
Environmental impact Transport, per 1000 kgkm (1.074 g/cm³)		7,66
Production site: Germany/ZEITRAUM		
Truck - ca. 200 km	A4	10
Total non-renewable primary energy (PENRT)	241,6 MJ	
Use of freshwater resources (FW)	0,012776 m ³	
Global Warming Potential (GWP)	17,938 Kg CO ₂ -eqv.	
Main raw material origin (grasses): Germany/production site		10
Truck - < 100 km	A4	
Total non-renewable primary energy (PENRT)	120,8 MJ	
Use of freshwater resources (FW)	0,006388 m ³	
Global Warming Potential (GWP)	8,97 Kg CO ₂ -eqv.	
Main raw material origin (PP): n.a./production site		3
n.a. - ø > 7000 km	A4	
Total non-renewable primary energy (PENRT)	8456 MJ	

⁸ BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

⁹ KALWEIT A. (2012) - Handbook of technical product design - materials and manufacturing. Berlin: Springer Verlag

Use of freshwater resources (FW)	0,44716 m ³	
Global Warming Potential (GWP)	627,83 Kg CO ₂ -eqv.	

Sustainability Assessment

Longevity	Very durable (> 20 years)	8
Biological reproduction/ recycled material	50 %	5
Circulation potential	70 - 99 % technological/downcycling	7
Socially compatible	Yes	10
Total average rating		7,44

Processing

Mechanically	Very good; with conventional plastic processing machines; drilling, sawing; milling; etc.	
Adhesion	Good; with adhesives for low-energy plastics	
Surface finishing	Brushing; Sanding; Painting; Oiling; Embossing	
Resistance	Low-maintenance; water-resistant; resistant to fungi and insects; weather-resistant with plastic content > 30 %	

Physical properties

Bulk density according to DIN EN ISO 1183	1,074 g/cm ³	
Vicat softening temperature according to DIN EN ISO 306 Vicat B/50	110 °C	

Mechanical properties


Flexural strength (σ_{bB})	22,3 N/mm ²	
Tensile strength ($\sigma_{zB} $)	15,1 N/mm ²	
E-modulus ($E_b $)	1003 N/mm ²	
Elongation according to DIN EN ISO 527	2,9 %	

Notes

Recyclable and residue-free disposal when incinerated;
AgriPlast NFPP 5050 HM consists of 50 % cellulosic fibers derived from grasses and 50 % polypropylene



4 Polyamide

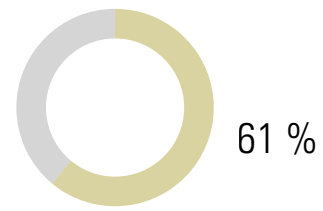

Tab. 4 A: Material data sheet, polyamide, general¹⁰

Material group	Synthetic material; plastic
Name	Polyamide (GB, US); Polyamid (D)
Short name	PA
Manufactured in	Germany (GER)
Use	Machine and equipment construction; vehicle construction; electrical engineering; furniture construction

¹⁰ KALWEIT A. (2012) - Handbook of technical product design - materials and manufacturing. Berlin: Springer Verlag

Tab. 4 B: Material data sheet, polyamide, specific^{11,12}**General description**

Certifications/Information	n.a.	
Delivery forms	Granules, fibers, pipes, films, molded parts	
Color	Available in all colors	

Life cycle assessment data Nylon casting (PA 6.6) (GER) 3

Resource input per kg	A1-A3	
Total non-renewable primary energy (PENRT)	251,7 MJ	0
Use of freshwater resources (FW)	0,04378 m ³	10

Environmental impact per kg	A1-A3	
Global Warming Potential (GWP)	16,91 Kg CO ₂ -eqv.	0

Environmental impact Transport, per 1000 kgkm (1140 kg/m³) 6,5**Production site: Germany/ZEITRAUM**

Truck - ca. 500 km	A4	10
Total non-renewable primary energy (PENRT)	604 MJ	
Use of freshwater resources (FW)	0,03194 m ³	
Global Warming Potential (GWP)	44,845 Kg CO ₂ -eqv.	

Main raw material origin: n.a./production site

n.a. - ø > 7000 km	A4	3
Total non-renewable primary energy (PENRT)	8456 MJ	
Use of freshwater resources (FW)	0,44716 m ³	
Global Warming Potential (GWP)	627,83 Kg CO ₂ -eqv.	

Sustainability Assessment

Longevity	Very durable (> 20 years)	8
Biological reproduction/ recycled material	0 %	0
Circulation potential	100 % (technological)	10
Socially compatible	Yes	9
Total average rating		6,08

Processing


¹¹ BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

¹² MATERIALARCHIV (2019) - Materialarchiv <<http://www.materialarchiv.ch/app-tablet/#search>> Accessed, on 03/01/2019

Mechanically	Very good; with conventional plastic processing machines; drilling, sawing; milling; etc.	
Adhesion	Good; with adhesives for low-energy plastics	
Surface processing	Brushing; Sanding; Painting; Oiling; Embossing	
Resistance	Easy care; water resistant; resistant to fungi and insects	
Properties		
Elongation at break	50,0 %	
Density	1140 kg/m ³	
Moisture absorption	2,5 - 3,5 %	
Dielectric strength	25 kV/mm	
Notched impact strength (Charpy)	3,0 kJ/m ²	
Thermal properties		
Vicat softening temperature according to DIN EN ISO 306 Vicat B/50	250 °C	
Continuous operating temperature	-30 bis 95 °C	



5 Osmo, hard wax oil

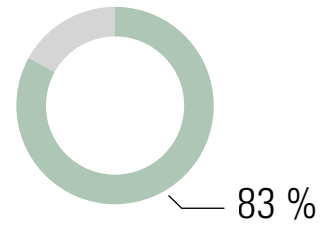

Tab. 5 A: Material data sheet, Osmo, hard wax oil, general¹³¹⁴

Material group	Coating materials; Oils
Name	Hard wax oil (GB, US); Hartwachsöl (D)
Manufacturer	Osmo Holz und Color GmbH & Co. KG
Manufactured in	Germany (GER)
Version	Osmo Hard Wax Oil 3032 satin, 3062 matt
Use	Furniture construction; for interior use; also suitable for parquet, cork and terracotta

¹³ KALWEIT A. (2012) - Handbook of technical product design - materials and manufacturing. Berlin: Springer Verlag

¹⁴ Osmo (2019) - Osmo Hard Wax Oil 3032 satin, 3062 matte <<https://www.osmo.de>> Accessed, on 03/02/2019

Tab. 5 B: Material data sheet, Osmo, hard wax oil, specific¹⁵¹⁶

General description		
Certifications/Information	ISO 9001, ISO 14001, ISO 18001	
Emission class (formaldehyde)	Formaldehyde-free	
VOC's	< 500 g/l (volatile components emit during curing)	
Delivery forms	Liquid	
Color	yellowish (transparent/yellowish in cured form)	
Texture	Glossy to matt (cured)	
Contents		
50 - 60 % solids	Natural oils and waxes (sunflower oil, soybean oil, safflower oil, carnauba and candellila wax) Paraffins	
Additives	Siccatives (desiccants) and water-repellent additives	
Solvent	Desaromatized white spirit (gasoline-free - according to the purity requirements of the European Pharmacopoeia)	
Life cycle assessment data hard wax oil (GER)		5
Resource input per kg	A1-A3	
Total non-renewable primary energy (PENRT)	n.a.	
Use of freshwater resources (FW)	n.a.	
Environmental impact per kg	A1-A3	
Global Warming Potential (GWP)	n.a.	
Environmental impact Transport, per 1000 kgkm		9
Production site: Germany/ZEITRAUM		
Truck - ca. 200 km	A4	10
Total non-renewable primary energy (PENRT)	172,12 MJ	
Use of freshwater resources (FW)	0,012106 m ³	
Global Warming Potential (GWP)	12,822 Kg CO ₂ -eqv.	
Main raw material origin: n.a./production site		
n.a. - ø 3000 km	A4	8
Total non-renewable primary energy (PENRT)	3624 MJ	
Use of freshwater resources (FW)	0,19164 m ³	

¹⁵ BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

¹⁶ MATERIALARCHIV (2019) - Materialarchiv <<http://www.materialarchiv.ch/app-tablet/#search>> Accessed, on 03/01/2019

Global Warming Potential (GWP)	296,07 Kg CO ₂ -eqv.	
--------------------------------	---------------------------------	--

Sustainability Assessment

Longevity	Very durable/repairable (> 20 years, with good care)	10
Biological reproduction/ recycled material	51 - 60 %	6
Circulation potential	100 % (biodegradable)	10
Socially compatible	Yes	10
Total average rating		8,33

Processing

Application	With brush, spatula or spray gun	
Storage	Can be stored up to 5 years with tight closure	

Properties


Density	0,89 g/cm ³	
Viscosity	Thixotropic, creamy	
Consistency	Medium viscosity	
Moisture resistance	Good	

Notes

Osmo Polyx®-Oil is based on natural vegetable oils and waxes; Osmo Polyx®-Oil contains neither biocides nor preservatives. It is harmless to humans, animals and plants when dry and complies with DIN 53160 (sweat- and saliva-proof) and EURO-NORM EN 71 (suitable for children's toys)



6 PVAc dispersion adhesive, D3

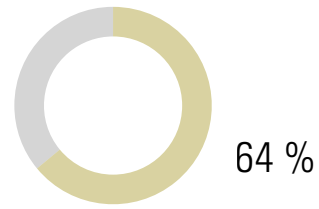

Tab. 6 A: Material data sheet, PVAc dispersion adhesive, D3, general¹⁷¹⁸

Material group	Synthetic material; adhesives; dispersion adhesives
Name	Dispersion Adhesive (GB, US); Dispersionsklebstoff, PVAc-(Polyvinylacetat) Klebstoffe, Weißleim (D)
Manufacturer	Kleiberit Klebstoffe GmbH
Manufactured in	Germany (GER)
Version	Kleiberit 303, D3-adhesive
Use	Furniture construction; especially for interiors; staircase construction, ship interior finishing; surface bonding of HWS; door and window production

¹⁷ KALWEIT A. (2012) - Handbook of technical product design - materials and manufacturing. Berlin: Springer Verlag

¹⁸ KEIBERIT (2019) - KLEIBERIT 303, D3, PVAc Adhesive <https://interior-construction.kleiberit.com/fileadmin/Content/Documents/DE/Infoblaetter/303_D3_Leim_D.pdf> Accessed, on 02/03/2019

Tab. 6 B: Material data sheet, PVAc dispersion adhesive, D3, specific¹⁹²⁰**General description**

Certifications/Information	ISO 9001, ISO 14001, ISO 50001	
Emission class (formaldehyde)	Formaldehyde-free	
Delivery forms	Liquid	
Color	Whitish (transparent in cured form)	
Texture	Glossy	

Life cycle assessment data Dispersion-based solvent-free adhesives, coatings and sealants (GER) 10**Resource input per kg** A1-A3

Total non-renewable primary energy (PENRT)	26,7 MJ	10
--	---------	----

Use of freshwater resources (FW)	0,00758 m ³	10
----------------------------------	------------------------	----

Environmental impact per kg A1-A3

Global Warming Potential (GWP)	0,955 Kg CO ₂ -eqv.	10
--------------------------------	--------------------------------	----

Environmental impact Transport, per 1000 kgkm 6,5**Production site: Germany/ZEITRAUM**

Truck - ca. 200 km	A4	10
---------------------------	----	----

Total non-renewable primary energy (PENRT)	172,12 MJ	
--	-----------	--

Use of freshwater resources (FW)	0,012106 m ³	
----------------------------------	-------------------------	--

Global Warming Potential (GWP)	12,822 Kg CO ₂ -eqv.	
--------------------------------	---------------------------------	--

Main raw material origin: n.a./production site

n.a. - ø > 7000 km	A4	3
------------------------------	----	---

Total non-renewable primary energy (PENRT)	8456 MJ	
--	---------	--

Use of freshwater resources (FW)	0,44716 m ³	
----------------------------------	------------------------	--

Global Warming Potential (GWP)	627,83 Kg CO ₂ -eqv.	
--------------------------------	---------------------------------	--

Sustainability Assessment

Longevity	Very durable/moderately repairable (> 20 years)	9
-----------	---	---

Biological reproduction/ recycled material	0 %	0
---	-----	---

Circulation potential	Only thermally recyclable	4
-----------------------	---------------------------	---

Socially compatible	Yes	9
---------------------	-----	---

¹⁹ BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

²⁰ MATERIALARCHIV (2019) - Materialarchiv <<http://www.materialarchiv.ch/app-tablet/#search>> Accessed, on 03/01/2019

Total average rating**6,41****Processing**

Adhesion	With brush, spatula or glue roller	
----------	------------------------------------	--

Properties

Density	1,1 g/cm ³	
---------	-----------------------	--

PH level	3	
----------	---	--


Consistency	Medium viscosity	
-------------	------------------	--

Moisture resistance	D3	
---------------------	----	--


Heat resistance	Up to 120 °C	
-----------------	--------------	--

Notes

	PVAc adhesive is available solvent-free and solvent-based	
--	---	--

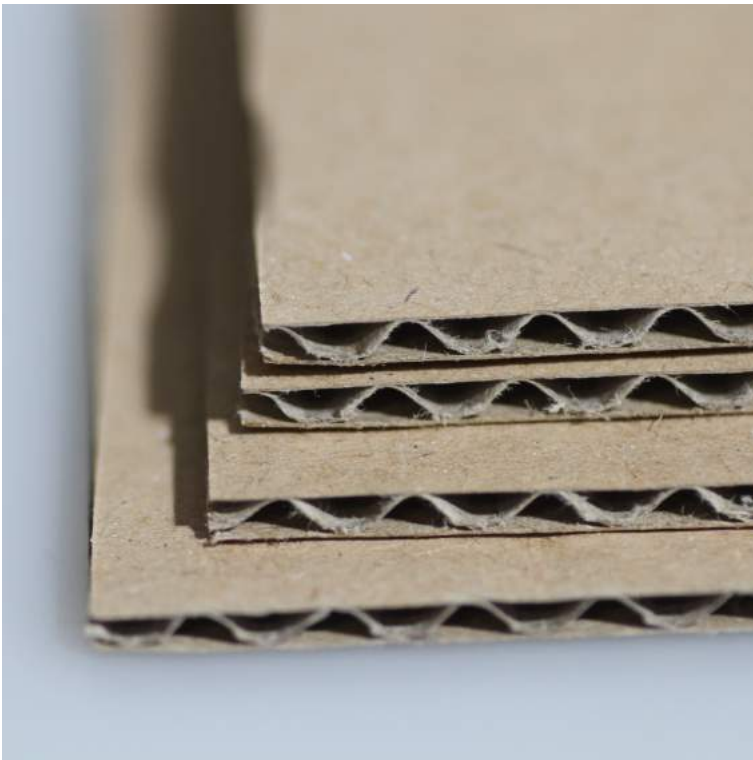

7 Cardboard, beds, tables & storage

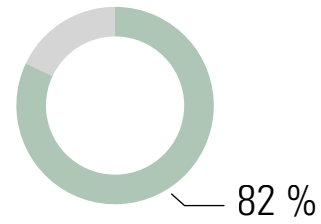

Tab. 7 A: Cardboard, beds, tables & storage, general

Material group	Packaging
Name	Cardboard (GB, US); Karton (D)
Manufacturer	Monowell GmbH & Co. KG
Manufactured in	Germany (GER)
Use	Packing material for individual wrapping of the furniture

Tab. 7 B: Cardboard, beds, tables & storage, specific²¹²²**General description**


Certifications/Information	ISO 9001, ISO 50001, ISO 22000 DE, ISO 22000 EN, FSC	
Color	Brown	
Texture	matt	
Contents		
60 %	Recycled paper	
40 %	Primary raw material	
Life cycle assessment data „Kraftpapier“ (GER)		10
Resource input per kg	A1-A3	
Total non-renewable primary energy (PENRT)	5,888 MJ	
Use of freshwater resources (FW)	0,004899 m ³	
Environmental impact per kg	A1-A3	
Global Warming Potential (GWP)	-0,8973 Kg CO ₂ -eqv.	
Environmental impact Transport, per 1000 kgkm		9
Production site: Germany/ZEITRAUM		
Truck - ca. 200 km	A4	10
Total non-renewable primary energy (PENRT)	172,12 MJ	
Use of freshwater resources (FW)	0,012106 m ³	
Global Warming Potential (GWP)	12,822 Kg CO ₂ -eqv.	
Main raw material origin: Germany, Central Europe/Production site		
Truck - ca. 1500 km	A4	8
Total non-renewable primary energy (PENRT)	1812 MJ	
Use of freshwater resources (FW)	0,09582 m ³	
Global Warming Potential (GWP)	134,535 Kg CO ₂ -eqv.	
Sustainability Assessment		
Longevity	Moderately durable/repairable (< 10 years)	4
Biological reproduction/ recycled material	60 %	6
Circulation potential	100 % (technological)	10

²¹ BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

²² MATERIALARCHIV (2019) - Materialarchiv <<http://www.materialarchiv.ch/app-tablet/#search>> Accessed, on 03/01/2019

Socially compatible	Yes	10
Total average rating		8,16
Disposal note	Waste paper	

8 Polyester fleece

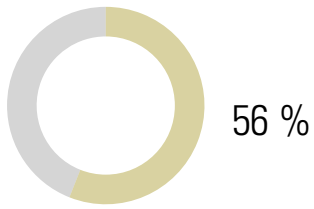

Tab. 8 A: Material data sheet, polyester fleece, general

Material group	Packaging
Name	Polyester fleece (GB); Polyestervlies (D)
Material abbreviation	PES
Manufactured in	Germany (GER)
Use	Packing material for protection

Tab. 8 B: Material data sheet, polyester fleece, specific²³²⁴

General description		
Certifications/Information	n.a.	
Delivery form	Mats, wadding, etc.	
Texture	soft, fibrous	
Life cycle assessment data Comparative material for PE wadding (no data available) - PE nonwoven (GER)		3
Resource input per kg	A1-A3	
Total non-renewable primary energy (PENRT)	22 MJ	
Use of freshwater resources (FW)	0,00252 m ³	
Environmental impact per kg	A1-A3	
Global Warming Potential (GWP)	0,73 Kg CO ₂ -eqv.	
Environmental impact Transport, per 1000 kgkm (approx. 0.5 kg/m²)		6,5
Production site: Germany/ZEITRAUM		
Truck - ca. 500 km	A4	10
Total non-renewable primary energy (PENRT)	430,3 MJ	
Use of freshwater resources (FW)	0,030265 m ³	
Global Warming Potential (GWP)	32,055 Kg CO ₂ -eqv.	
Main raw material origin: n.a./production site		3
n.a. - ø > 7000 km	A4	
Total non-renewable primary energy (PENRT)	8456 MJ	
Use of freshwater resources (FW)	0,44716 m ³	
Global Warming Potential (GWP)	627,83 Kg CO ₂ -eqv.	
Sustainability Assessment		
Longevity	Durable (10 - 20 years)	5
Biological reproduction/ recycled material	0 %	0
Circulation potential	100 % (technological)	10
Socially compatible	Yes	9
Total average rating		5,58


²³ BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

²⁴ MATERIALARCHIV (2019) - Materialarchiv <<http://www.materialarchiv.ch/app-tablet/#search>> Accessed, on 03/01/2019

Disposal note

Recyclable waste

9 PP strapping

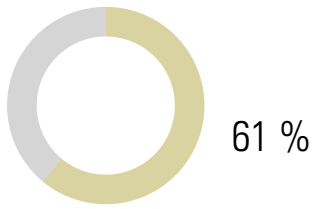

Tab. 9 A: Material data sheet, PP strapping, general

Material group	Packaging
Name	TEWE® Polypropylene strapping
Material abbreviation	PP
Manufacturer	Teufelberger
Manufactured in	Austria (AT)
Use	Packing material for protection

Tab. 9 B: Material data sheet, PP strapping, specific²⁵²⁶

General description

Certifications/Information	ISO 9001, ISO 14001	
Life cycle assessment data Comparative material for PP (no data available) (GER)		5
Resource input per kg	A1-A3	
Total non-renewable primary energy (PENRT)	n.a.	
Use of freshwater resources (FW)	n.a.	
Environmental impact per kg	A1-A3	
Global Warming Potential (GWP)	n.a.	
Environmental impact Transport, per 1000 kgkm (approx. 0.5 kg/m²)		6,5
Production site: Austria/ZEITRAUM		
Truck - ca. 300 km	A4	10
Total non-renewable primary energy (PENRT)	362,4 MJ	
Use of freshwater resources (FW)	0,019164 m ³	
Global Warming Potential (GWP)	26,907 Kg CO ₂ -eqv.	
Main raw material origin: n.a./production site		3
n.a. - ø > 7000 km	A4	
Total non-renewable primary energy (PENRT)	8456 MJ	
Use of freshwater resources (FW)	0,44716 m ³	
Global Warming Potential (GWP)	627,83 Kg CO ₂ -eqv.	
Sustainability Assessment		
Longevity	Durable (10 - 20 years)	5
Biological reproduction/ recycled material	0 %	0
Circulation potential	100 % (technological)	10
Socially compatible	Yes	10
Total average rating		6,08
Disposal note	Recyclable waste	

²⁵ BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

²⁶ MATERIALARCHIV (2019) - Materialarchiv <<http://www.materialarchiv.ch/app-tablet/#search>> Accessed, on 03/01/2019

Information on all materials used by ZEITRAUM
can be found in our material library at:

www.zeitraum-moebel.com

Important note: Our Furniture Footprint product data sheets have no scientific claim and are to be understood as a guide for our customers and us. All data are marked with corresponding source information. The contents of our Furniture Footprint product database have been compiled with the utmost care. However, we do not guarantee the accuracy, completeness and timeliness of the content, so we do not assume any liability for incorrect, outdated or incomplete information.