ZEITRAUM

GUEST

Design by Hertel & Klarhoefer, 2007

zeitraum-moebel.de

GUEST, 90 x 200, incl. SILENT; oak

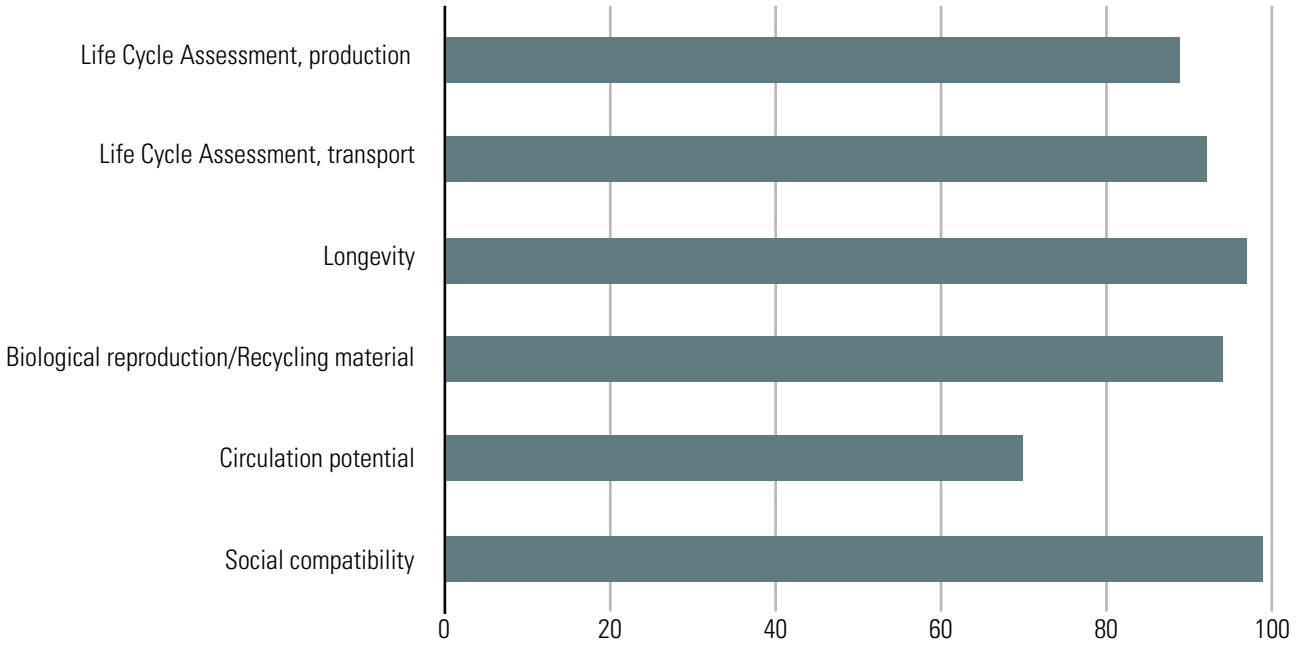

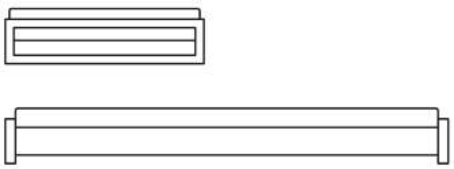

- wood/wood based material
- SILENT rubber
- steel
- other



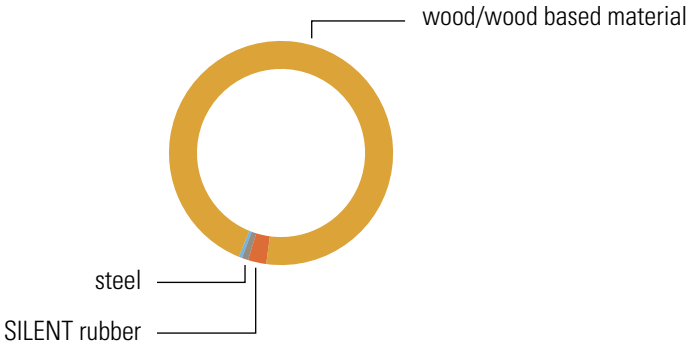

Flat pack

GUEST, 90 x 200, incl. SILENT; oak	Material/Product rating									
	Oak	Beech	Slatted frame slats	SILENT rubber	Al	Steel	PA	Natural oil, Osmo	PVAC	Weighted rating, %
Life Cycle Assessment, production	10	10	6,33	5	0	5,33	3	5	10	88,54745 %
Life Cycle Assessment, transport	9	10	10	6	4	4	6,5	9	6,5	92,388 %
Longevity	10	10	9	8	9	10	8	10	9	96,807 %
Biological reproduction/ Recycling material	10	10	9	0	6	9	0	6	0	94,365 %
Circulation potential	8	8	4	10	8	10	10	10	4	70,344 %
Social compatibility	10	10	10	9	8	8	9	10	9	99,455 %
Average rating, ø	9,5	9,666	8,055	6,333	5,833	7,721	6,083	8,333	6,416	Total weight
Share in kg	15,8	3,3	7,0	0,72	0,032	0,25	0,01	0,04	0,04	27,192
Share in %	58,1 %	12,13 %	25,74 %	2,64 %	0,11 %	0,91 %	0,03 %	0,14 %	0,14 %	
Weighted rating	5,519	1,172	2,073	0,167	0,006	0,07	0,001	0,011	0,008	
Product rating in %	**90,27**									

Packaging	Material/Product rating			
	Cardboard	Polyester fleece	PP strapping	Weighted rating, %
Life Cycle Assessment, production	10	3	5	95,18 %
Life Cycle Assessment, transport	9	6,5	6,5	88,141 %
Longevity	4	5	5	40,736 %
Biological reproduction/Recycling material	6	0	0	55,554 %
Circulation potential	10	10	10	99,99 %
Social compatibility	10	9	10	99,435 %
Average rating, ø	8,166	5,583	6,083	Total weight
Share in kg	5	0,3	0,1	5,4
Share in %	92,59 %	5,55 %	1,85 %	
Weighted rating	7,56	0,309	0,112	
Product rating in %	**79,81**			

1 Oak



Tab. 1 A: Material data sheet, oak, general[1][2]

Material group	Natural material; wood; hardwood
Botanical name	*Quercus robur L./Q. patrea Liebl. (Fagaceae)*
Name	European Oak (GB, US); Eiche (D), Sommereiche (D); Chêne (F)
Material Norm. Ref.	DIN EN 13556: QCXE
Origin	Germany, (Central Europe)
Occurrence	Europe to Asia Minor; North America; most common European occurrence in France
Use	Solid and veneer, mainly sliced veneer; furniture and interior fittings; paneling and parquet; structural timber, etc.

[1] WAGENFUEHR, R. (2007) - Wood Atlas. (6) Leipzig: Hanser Wirtschaft, Fachbuchverlag Leipzig, pp. 255-277

[2] LOHMANN, U. (2010) - Wood encyclopedia. The standard work for wood and forestry. (4) Hamburg: Nikol-Verlag, pp. 284-285

Tab. 1 B: Material data sheet, oak, specific[3]

General description		
Certifications/Information	FSC and PEFC on request	
Life cycle assessment data hardwood, average (GER)		10
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	2,18 MJ	10
Use of freshwater resources (FW)	0,00048 m^3	10
Environmental impact per m^3	**A1-A3**	
Global Warming Potential (GWP)	-1,74 Kg CO_2-eqv.	10
Environmental impact Transport, per 1000 kgkm (690 kg/m^3)		9
Production site: Germany/ZEITRAUM		
Truck - ca. 300 km	A4	10
Total non-renewable primary energy (PENRT)	362,4 MJ	
Use of freshwater resources (FW)	0,019164 m^3	
Global Warming Potential (GWP)	26,907 Kg CO_2-eqv.	
Main raw material origin: Germany, Central Europe/Production site		
Truck - ca. 1500 km	A4	8
Total non-renewable primary energy (PENRT)	1812 MJ	
Use of freshwater resources (FW)	0,09582 m^3	
Global Warming Potential (GWP)	134,535 Kg CO_2-eqv.	
Sustainability Assessment		
Longevity	Very durable/repairable (> 20 years)	10
Biological reproduction/ recycled material	100 %	10
Circulation potential	70 % - 99 % (technological/recycling)	8
Socially compatible	Yes	10
Total average rating		**9,5**
Processing		
Mechanical	Good; can be cut and peeled, suitable for turning and carving; pre-drill thin wood for nailing	
Drying	Moderately good; slow; tendency to tear and warp; predrying outdoors favorable; good durability	

[3] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

Adhesion	Good; alkalis can cause stains	
Surface finishing	Good; can be stained and varnished, if necessary use pore filler when varnishing; tinting of wood color by smoking	
Natural durability DIN EN 350-2	durable; sapwood low;heartwood durable; also in water; durability class 2	
Physical properties		
Kiln density (0 % wood moisture content)	390… 650… 930 kg/m³	
Bulk density (12 - 15 % wood moisture)	430… 690… 960 kg/m³	
Pore ratio	ca. 57 %	
Shrinkage rate at 1 % moisture reduction	radial - 0,20 %; tangetial - 0,32 %; volume - 0,45 %	
Mechanical properties		
Compressive strength (σ_{dB})	Q. robur: 54… 61… 67 N/mm² Q. petraea: 48… 65… 70 N/mm²	
Flexural strength (σ_{bB})	Q. robur: 74… 88… 105 N/mm² Q. petraea: 78… 110… 117 N/mm²	
Tensile strength (σ_{zB} ‖) Tensile strength (σ_{zB} ⊥)	50… 90… 180 N/mm² 2,6… 4,0… 9,6 N/mm²	
Shear strength (τ_{aB})	6,0… 11,0… 13,0 N/mm²	
Hardness (HB ‖)	50… 66 N/mm²	
Hardness (HB ⊥)	25… 34 N/mm²	
E-modulus (E_b ‖)	Q. robur: 10000… 11700… 13200 N/mm² Q. petraea: 9200… 13000… 13500 N/mm²	

2 Beech



Tab. 2 A: Material data sheet, beech, general[4][5]

Material group	Natural material; wood; hardwood
Botanical name	*Fachs sylvatica L. (Fagaceae)*
Name	Beech (GB); Buche, Rotbuche (D); Hétre (F)
Material Norm. Ref.	DIN EN 13556: FASY
Origin	Northern Germany, Germany, (Central Europe)
Occurrence	Western, central and southern Europe; prefers loose, mineral-rich and well-watered soils; sensitive to low temperatures and late frosts
Use	Veneer; mainly as peeling lumber for plywood, composite panels, etc.; furniture making; paneling and parquet; structural lumber for medium duty, automotive and mechanical engineering, building construction and civil engineering; specialty lumber for particleboard and fiberboard, pulp and paper, sports equipment, workbenches, stairs; musical instruments, etc.

[4] WAGENFUEHR, R. (2007) - Wood Atlas. (6) Leipzig: Hanser Wirtschaft, Fachbuchverlag Leipzig, pp. 672-676

[5] LOHMANN, U. (2010) - Wood encyclopedia. The standard work for wood and forestry. (4) Hamburg: Nikol-Verlag, page 192

Tab. 2 B: Material data sheet, beech, specific[6]

General description		
Certifications/Information	FSC and PEFC on request	
Life cycle assessment data hardwood, average (GER)		10
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	2,18 MJ	10
Use of freshwater resources (FW)	0,00048 m³	10
Environmental impact per m³	**A1-A3**	
Global Warming Potential (GWP)	-1,74 Kg CO_2-eqv.	10
Environmental impact Transport, per 1000 kgkm (720 kg/m³)		10
Production site: Germany/ZEITRAUM		
Truck - ca. 300 km	A4	10
Total non-renewable primary energy (PENRT)	362,4 MJ	
Use of freshwater resources (FW)	0,019164 m³	
Global Warming Potential (GWP)	26,907 Kg CO_2-eqv.	
Main raw material origin: Germany, Central Europe/Production site		
Truck - ca. 1000 km	A4	10
Total non-renewable primary energy (PENRT)	1208 MJ	
Use of freshwater resources (FW)	0,06388 m³	
Global Warming Potential (GWP)	89,69 Kg CO_2-eqv.	
Sustainability Assessment		
Longevity	Very durable/repairable (> 20 years)	10
Biological reproduction/ recycled material	100 %	10
Circulation potential	70 % - 99 % (technological/recycling)	8
Socially compatible	Yes	10
Total average rating		**9,66**
Processing		
Mechanical	Good for sawing, planing, turning, bending, carving; optimum cutting speed 30 m/s, can be cut and peeled	
Drying	Good; tendency to tear and warp; dry gently as it shrinks a lot	

[6] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

Adhesion	Good	
Surface finishing	Good; can be stained and varnished	
Natural durability DIN EN 350-2 (with weathering)	Low; susceptible to fungus and insects; not weather resistant; protect carefully in outdoor areas; durability class 3 to 4	
Physical properties		
Kiln density (0 % wood moisture content)	490… 680… 880 kg/m³	
Bulk density (12 - 15 % wood moisture)	540… 720… 910 kg/m³	
Pore ratio	ca. 55 %	
Shrinkage rate at 1 % moisture reduction	radial - 0,20 %; tangetial - 0,40 %; volume - 0,46… 0,60 %	
Mechanical properties		
Compressive strength (σ_{dB})	41… 62… 99 N/mm²	
Flexural strength (σ_{bB})	74… 123… 210 N/mm²	
Tensile strength (σ_{zB} ⊥)	7,0… 10,7 N/mm²	
Shear strength (τ_{aB})	6,5… 8,0… 19,0 N/mm²	
Hardness (HB ‖)	ca. 72 N/mm²	
Hardness (HB ⊥)	ca. 34 N/mm²	
E-modulus (E_b ‖)	10000… 16000… 18000 N/mm²	

3 Slatted frame slats



Tab. 3 A: Slatted frame, general[7]

Material group	Natural-synthetic material; wood-based materials; plywood; veneer panels
Name	Plywood (GB, US) Schichtholz Leisten(D)
Short name	FU
Manufactured in	Germany
Origin of the wood	Germany
Version	Slatted frame slats
Use	Slatted frames

[7] KALWEIT, A., a.o. (2012) - Handbook of Technical Product Design, Materials and Manufacturing - Decision Bases for Designers and Engineers (2) Berlin: Springer-Verlag Berlin Heidelberg GmbH

Tab. 3 B: Slatted frame slats, specific[8][9]

General description (manufacturer spec.)		
Certifications/Information	PEFC	
Life cycle assessment data plywood, average (GER)		6,33
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	6,8 MJ	8
Use of freshwater resources (FW)	0,004 m³	1
Environmental impact per m³	**A1-A3**	
Global Warming Potential (GWP)	-1,5 Kg CO_2-eqv.	10
Environmental impact Transport, per 1000 kgkm (590-600 kg/m³)		10
Production site: Germany/ZEITRAUM		
Truck - ca. 300 km	A4	10
Total non-renewable primary energy (PENRT)	362,4 MJ	
Use of freshwater resources (FW)	0,019164 m³	
Global Warming Potential (GWP)	26,907 Kg CO_2-eqv.	
Main raw material origin: Germany/Production site		
Truck - ca. < 100 km	A4	10
Total non-renewable primary energy (PENRT)	120,8 MJ	
Use of freshwater resources (FW)	0,006388 m³	
Global Warming Potential (GWP)	8,969 CO_2-eqv.	
Sustainability Assessment		
Longevity	Very durable/moderately repairable (> 20 years)	9
Biological reproduction/ recycled material	90 %	9
Circulation potential	Only thermally recyclable	4
Socially compatible	Yes	10
Total average rating		**8,05**
Processing		
Mechanical	Very good; can be sawed, drilled and milled with common machines	

[8] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

[9] WEZEL, O. (2019) - Strength properties of wood-based materials according to DIN EN 622 <http://www.tischler-ole-welzel.de/Holzwerkstoffe/Faserplatten%20nach%20DIN%20EN%2013986.pdf> Accessed, on 09/03/2019

Adhesion	Very good	
Surface finishing	good; varnishable; coating possible	
Durability	By changing the synthetic binder or adding further additives, an increase in fire resistance, resistance to fungi and insects and moisture resistance can be achieved (see manufacturer's instructions)	

4 SILENT rubber bearings

63 %

Tab. 4 A: SILENT rubber bearings, general

Material group	Thermoplastic rubber
Name	Thermoplastic Rubber (GB); thermoplastisches Kautschuk (D)
Manufactured in	Germany (GER)
Origin	n.a.
Further processed in	Germany (GER)
Use	Due to its excellent rebound capacity, this material is particularly suitable for end point bearing production. The durability while retaining the specific material properties should be particularly noted

Tab. 4 B: SILENT rubber bearings, specific[10][11]

General description		
Certifications/Information	REACH	
Emission class (formaldehyde)	Formaldehyde-free	
Surface	smooth	
Color	beige	
Basic materials		
Life cycle assessment data		5
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	n.a.	
Use of freshwater resources (FW)	n.a.	
Environmental impact per kg	**A1-A3**	
Global Warming Potential (GWP)	n.a.	
Environmental impact Transport, per 1000 kgkm		6
Production site: Germany/ZEITRAUM		
Truck - ca. 500 km	A4	9
Total non-renewable primary energy (PENRT)	845,6 MJ	
Use of freshwater resources (FW)	0,044716 m^3	
Global Warming Potential (GWP)	62,783 Kg CO_2-eqv.	
Main raw material origin: n.a./production site		
n.a. - ø > 7000 km	A4	3
Total non-renewable primary energy (PENRT)	8456 MJ	
Use of freshwater resources (FW)	0,44716 m^3	
Global Warming Potential (GWP)	627,83 Kg CO_2-eqv.	
Sustainability Assessment		
Longevity	Very durable (> 20 years)	8
Biological reproduction/ recycled material	n.a.	0
Circulation potential	100 % (technological)	10
Socially compatible	Yes	9
Total average rating		**6,33**

[10] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

[11] MATERIALARCHIV (2019) - Materialarchiv <http://www.materialarchiv.ch/app-tablet/#search> Accessed, on 03/01/2019

Notes	- Extremely high elasticity - High fatigue strength and bending elasticity - Absolutely free of PVC	

5 Aluminium

58 %

Tab. 5 A: Material data sheet, aluminum, general[12][13]

Material group	Synthetic material; metals; light metals
Name	Aluminium (GB, US); Aluminium (D)
Short name	Al
Occurrence	Worldwide; largest manufacturing country for aluminum is China
Use	(Lightweight construction); articles of daily use in the sports and leisure sector; sanitary and architectural sector; electrical engineering: conductor material; furniture and accessories sector; aluminum foil; chemical industry; construction industry

[12] KALWEIT, A., a.o. (2012) - Handbook of Technical Product Design, Materials and Manufacturing - Decision Bases for Designers and Engineers (2) Berlin: Springer-Verlag Berlin Heidelberg GmbH

[13] BAUTABELLEN FÜR INGENIEURE , 21 Edition 2014, Bundesanzeiger Verlag GmbH, Cologne, Andrej Albert

Tab. 5 B: Material data sheet, aluminum, specific[14][15]

General description		
Certifications/Information	n.a.	
Emission class (formaldehyde)	Formaldehyde free	
Surface	Good reflectivity	
Color	Silvery	
Life cycle assessment data aluminum profile (GER)		0
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	112,7 MJ	0
Use of freshwater resources (FW)	0,1017 m^3	0
Environmental impact per kg	**A1-A3**	
Global Warming Potential (GWP)	8,589 Kg CO_2-eqv.	0
Environmental impact Transport, per 1000 kgkm (640 kg/m^3)		4
Production site: Europe/ZEITRAUM		
Truck ø - ca. 1500 km	A4	8
Total non-renewable primary energy (PENRT)	1812 MJ	
Use of freshwater resources (FW)	0,09582 m^3	
Global Warming Potential (GWP)	134 Kg CO_2-eqv.	
Main raw material origin: China/production site		0
Truck - ca. 2000 km	A4	
Total non-renewable primary energy (PENRT)	2416 MJ	
Use of freshwater resources (FW)	0,12776 m^3	
Global Warming Potential (GWP)	179,38 Kg CO_2-eqv.	
Container ship - ca. 10000 km	A4	
Total non-renewable primary energy (PENRT)	1094 MJ	
Use of freshwater resources (FW)	0,005636 m^3	
Global Warming Potential (GWP)	90,11 Kg CO_2-eqv.	
Sustainability Assessment		

[14] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

[15] MATERIALARCHIV (2019) - Materialarchiv <http://www.materialarchiv.ch/app-tablet/#search> Accessed, on 03/01/2019

Longevity	Very durable/moderately repairable (> 20 years)	9
Biological reproduction/ recycled material	52 % (Europe as of 2021)	6
Circulation potential	70 - 99 % technological/recycling	8
Socially compatible	Yes	8
Total average rating		**5,83**
Processing		
Mechanical	Very easy casting and forming (e.g. sand casting), bending, pressing, rolling, deep drawing and forging	
Joints	When welding, the use of a shielding gas such as argon or helium is recommended; simple joints by bonding with reactive adhesives such as epoxy resin or polyurethane; stable bonds result from light roughening of the bonding surface	
Surface finishing	Easy to grind and polish (fix with clear varnish); for colored surfaces due to the anodizing process	
Other	When exposed to air, aluminum forms a thin oxide layer on the surface. It protects the metal from corrosion and weathering	
Durability	Weather resistant; more corrosion resistant than iron	
Physical properties		
Density	2,7 g/cm³	
Mohs hardness	2,75	
Magnetism	paramagnetic	
Electrical conductivity	37,7*10^6 S/m	
Thermal Abrasiveness	237 W/(m*K)	
Mechanical properties aluminum (alloys) for sheets and profiles		
Yield strength (ßs)	90 - 250 N/mm²	
Tensile strength (ßz)	120 - 400 N/mm²	
Elongation at break	5 - 20 %	
E-modulus (E)	70*10^3 N/mm²	
Shear modulus (G)	27*10^3 N/mm²	
Poisson's ratio	0,3	
Notes	Aluminum production is very energy-intensive. Only about 1 % of this energy is needed to produce a comparable quantity of copper. A positive aspect is the good recyclability; aluminum has a neutral taste and is approved for contact with food	

6 Steel



Tab. 6 A: Material data sheet, steel, general[16]

Material group	Natural material; metals; transition metals
Parts origin	n.a.
Occurrence	Worldwide; South America, Western Australia, China and Eastern Europe, Canada
Use	According to application: building structural and tool steel, structural steel for machinery, vehicle and shipbuilding or mechanical engineering; line pipe, pressure vessel, etc.; handicraft and design; furniture making

[16] KALWEIT, A., a.o. (2012) - Handbook of Technical Product Design, Materials and Manufacturing - Decision Bases for Designers and Engineers (2) Berlin: Springer-Verlag Berlin Heidelberg GmbH

Tab. 6 B: Material data sheet, steel, specific[17][18]

General description		
Certifications/Information	n.a.	
Emission class (formaldehyde)	Formaldehyde free	
Surface	smooth, hard	
Color	Grey	
Life cycle assessment data Steel profile, (GER)		5,33
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	10,99 MJ	4
Use of freshwater resources (FW)	0,002314 m^3	4
Environmental impact per kg	**A1-A3**	
Global Warming Potential (GWP)	0,9944 Kg CO_2-eqv.	8
Environmental impact Transport, per 1000 kgkm (7850 kg/m^3)		4
Production site: Europe/ZEITRAUM		
Truck ø - ca. 1500 km	A4	8
Total non-renewable primary energy (PENRT)	1812 MJ	
Use of freshwater resources (FW)	0,09582 m^3	
Global Warming Potential (GWP)	134 Kg CO_2-eqv.	
Main raw material origin: China/production location		0
Truck - ca. 2000 km	A4	
Total non-renewable primary energy (PENRT)	2416 MJ	
Use of freshwater resources (FW)	0,12776 m^3	
Global Warming Potential (GWP)	179,38 Kg CO_2-eqv.	
Container ship - ca. 10000 km	A4	
Total non-renewable primary energy (PENRT)	1094 MJ	
Use of freshwater resources (FW)	0,005636 m^3	
Global Warming Potential (GWP)	90,11 Kg CO_2-eqv.	
Sustainability Assessment		

[17] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

[18] MATERIALARCHIV (2019) - Materialarchiv <http://www.materialarchiv.ch/app-tablet/#search> Accessed, on 03/01/2019

Longevity	Very durable/repairable (> 20 years)	10
Biological reproduction/ recycled material	80 - 90 %	9
Circulation potential	100 % (technological)	10
Socially compatible	Yes	8
Total average rating		**7,72**
Notes	The life cycle assessment of iron improves the more often the material has been recycled or the proportion of recycled material increases	

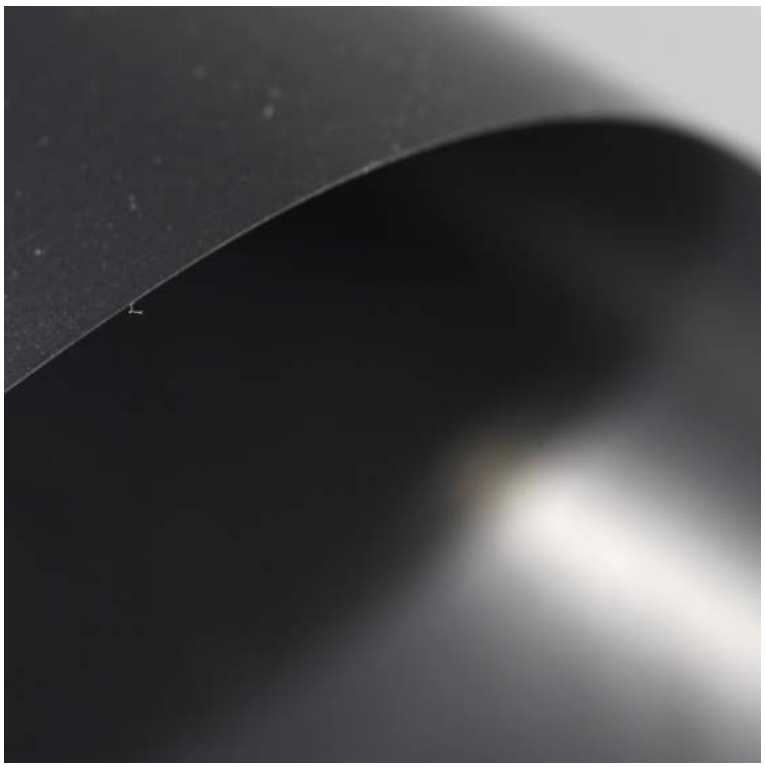

7 Polyamide

61 %

Tab. 7 A: Material data sheet, polyamide, general[19]

Material group	Synthetic material; plastic
Name	Polyamide (GB, US); Polyamid (D)
Short name	PA
Manufactured in	Germany (GER)
Use	Machine and equipment construction; vehicle construction; electrical engineering; furniture construction

[19] KALWEIT A. (2012) - Handbook of technical product design - materials and manufacturing. Berlin: Springer Verlag

Tab. 7 B: Material data sheet, polyamide, specific[20][21]

General description		
Certifications/Information	n.a.	
Delivery forms	Granules, fibers, pipes, films, molded parts	
Color	Available in all colors	
Life cycle assessment data Nylon casting (PA 6.6) (GER)		3
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	251,7 MJ	0
Use of freshwater resources (FW)	0,04378 m^3	10
Environmental impact per kg	**A1-A3**	
Global Warming Potential (GWP)	16,91 Kg CO_2-eqv.	0
Environmental impact Transport, per 1000 kgkm (1140 kg/m^3)		6,5
Production site: Germany/ZEITRAUM		
Truck - ca. 500 km	A4	10
Total non-renewable primary energy (PENRT)	604 MJ	
Use of freshwater resources (FW)	0,03194 m^3	
Global Warming Potential (GWP)	44,845 Kg CO_2-eqv.	
Main raw material origin: n.a./production site		
n.a. - ø > 7000 km	A4	3
Total non-renewable primary energy (PENRT)	8456 MJ	
Use of freshwater resources (FW)	0,44716 m^3	
Global Warming Potential (GWP)	627,83 Kg CO_2-eqv.	
Sustainability Assessment		
Longevity	Very durable (> 20 years)	8
Biological reproduction/ recycled material	0 %	0
Circulation potential	100 % (technological)	10
Socially compatible	Yes	9
Total average rating		**6,08**
Processing		

[20] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

[21] MATERIALARCHIV (2019) - Materialarchiv <http://www.materialarchiv.ch/app-tablet/#search> Accessed, on 03/01/2019

Mechanically	Very good; with conventional plastic processing machines; drilling, sawing; milling; etc.	
Adhesion	Good; with adhesives for low-energy plastics	
Surface processing	Brushing; Sanding; Painting; Oiling; Embossing	
Resistance	Easy care; water resistant; resistant to fungi and insects	
Properties		
Elongation at break	50,0 %	
Density	1140 kg/m³	
Moisture absorption	2,5 - 3,5 %	
Dielectric strength	25 kV/mm	
Notched impact strength (Charpy)	3,0 kJ/m²	
Thermal properties		
Vicat softening temperature according to DIN EN ISO 306 Vicat B/50	250 °C	
Continuous operating temperature	-30 bis 95 °C	

8 Osmo, hard wax oil



Tab. 8 A: Material data sheet, Osmo, hard wax oil, general[22][23]

Material group	Coating materials; Oils
Name	Hard wax oil (GB, US); Hartwachsöl (D)
Manufacturer	Osmo Holz und Color GmbH & Co. KG
Manufactured in	Germany (GER)
Version	Osmo Hard Wax Oil 3032 satin, 3062 matt
Use	Furniture construction; for interior use; also suitable for parquet, cork and terracotta

[22] KALWEIT A. (2012) - Handbook of technical product design - materials and manufacturing. Berlin: Springer Verlag

[23] Osmo (2019) - Osmo Hard Wax Oil 3032 satin, 3062 matte <https://www.osmo.de> Accessed, on 03/02/2019

Tab. 8 B: Material data sheet, Osmo, hard wax oil, specific[24][25]

General description		
Certifications/Information	ISO 9001, ISO 14001, ISO 18001	
Emission class (formaldehyde)	Formaldehyde-free	
VOC's	< 500 g/l (volatile components emit during curing)	
Delivery forms	Liquid	
Color	yellowish (transparent/yellowish in cured form)	
Texture	Glossy to matt (cured)	
Contents		
50 - 60 % solids	Natural oils and waxes (sunflower oil, soybean oil, safflower oil, carnauba and candellila wax) Paraffins	
Additives	Siccatives (desiccants) and water-repellent additives	
Solvent	Desaromatized white spirit (gasoline-free - according to the purity requirements of the European Pharmacopoeia)	
Life cycle assessment data hard wax oil (GER)		5
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	n.a.	
Use of freshwater resources (FW)	n.a.	
Environmental impact per kg	**A1-A3**	
Global Warming Potential (GWP)	n.a.	
Environmental impact Transport, per 1000 kgkm		9
Production site: Germany/ZEITRAUM		
Truck - ca. 200 km	A4	10
Total non-renewable primary energy (PENRT)	172,12 MJ	
Use of freshwater resources (FW)	0,012106 m^3	
Global Warming Potential (GWP)	12,822 Kg CO_2-eqv.	
Main raw material origin: n.a./production site		
n.a. - ø 3000 km	A4	8
Total non-renewable primary energy (PENRT)	3624 MJ	
Use of freshwater resources (FW)	0,19164 m^3	

[24] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

[25] MATERIALARCHIV (2019) - Materialarchiv <http://www.materialarchiv.ch/app-tablet/#search> Accessed, on 03/01/2019

Global Warming Potential (GWP)	296,07 Kg CO_2-eqv.	
Sustainability Assessment		
Longevity	Very durable/repairable (> 20 years, with good care)	10
Biological reproduction/ recycled material	51 - 60 %	6
Circulation potential	100 % (biodegradable)	10
Socially compatible	Yes	10
Total average rating		**8,33**
Processing		
Application	With brush, spatula or spray gun	
Storage	Can be stored up to 5 years with tight closure	
Properties		
Density	0,89 g/cm³	
Viscosity	Thixotropic, creamy	
Consistency	Medium viscosity	
Moisture resistance	Good	
Notes	Osmo Polyx®-Oil is based on natural vegetable oils and waxes; Osmo Polyx®-Oil contains neither biocides nor preservatives. It is harmless to humans, animals and plants when dry and complies with DIN 53160 (sweat- and saliva-proof) and EURO-NORM EN 71 (suitable for children's toys)	

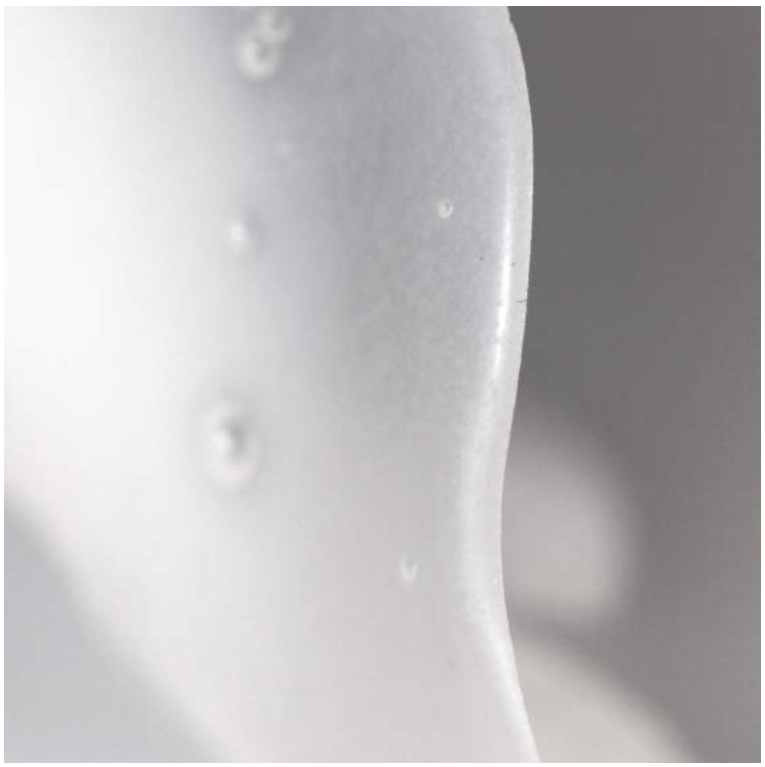

9 PVAc dispersion adhesive, D3

64 %

Tab. 9 A: Material data sheet, PVAc dispersion adhesive, D3, general[26][27]

Material group	Synthetic material; adhesives; dispersion adhesives
Name	Dispersion Adhesive (GB, US); Dispersionsklebstoff, PVAc-(Polyvinylacetat) Klebstoffe, Weißleim (D)
Manufacturer	Kleiberit Klebstoffe GmbH
Manufactured in	Germany (GER)
Version	Kleiberit 303, D3-adhesive
Use	Furniture construction; especially for interiors; staircase construction, ship interior finishing; surface bonding of HWS; door and window production

[26] KALWEIT A. (2012) - Handbook of technical product design - materials and manufacturing. Berlin: Springer Verlag

[27] KEIBERIT (2019) - KLEIBERIT 303, D3, PVAC Adhesive <https://interior-construction.kleiberit.com/fileadmin/Content/Documents/DE/Infoblaetter/303_D3_Leim_D.pdf> Accessed, on 02/03/2019

Tab. 9 B: Material data sheet, PVAc dispersion adhesive, D3, specific[28][29]

General description		
Certifications/Information	ISO 9001, ISO 14001, ISO 50001	
Emission class (formaldehyde)	Formaldehyde-free	
Delivery forms	Liquid	
Color	Whitish (transparent in cured form)	
Texture	Glossy	
Life cycle assessment data Dispersion-based solvent-free adhesives, coatings and sealants (GER)		10
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	26,7 MJ	10
Use of freshwater resources (FW)	0,00758 m^3	10
Environmental impact per kg	**A1-A3**	
Global Warming Potential (GWP)	0,955 Kg CO_2-eqv.	10
Environmental impact Transport, per 1000 kgkm		6,5
Production site: Germany/ZEITRAUM		
Truck - ca. 200 km	A4	10
Total non-renewable primary energy (PENRT)	172,12 MJ	
Use of freshwater resources (FW)	0,012106 m^3	
Global Warming Potential (GWP)	12,822 Kg CO_2-eqv.	
Main raw material origin: n.a./production site		
n.a. - ø > 7000 km	A4	3
Total non-renewable primary energy (PENRT)	8456 MJ	
Use of freshwater resources (FW)	0,44716 m^3	
Global Warming Potential (GWP)	627,83 Kg CO_2-eqv.	
Sustainability Assessment		
Longevity	Very durable/moderately repairable (> 20 years)	9
Biological reproduction/ recycled material	0 %	0
Circulation potential	Only thermally recyclable	4
Socially compatible	Yes	9

[28] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

[29] MATERIALARCHIV (2019) - Materialarchiv <http://www.materialarchiv.ch/app-tablet/#search> Accessed, on 03/01/2019

Total average rating		**6,41**
Processing		
Adhesion	With brush, spatula or glue roller	
Properties		
Density	1,1 g/cm³	
PH level	3	
Consistency	Medium viscosity	
Moisture resistance	D3	
Heat resistance	Up to 120 °C	
Notes	PVAc adhesive is available solvent-free and solvent-based	

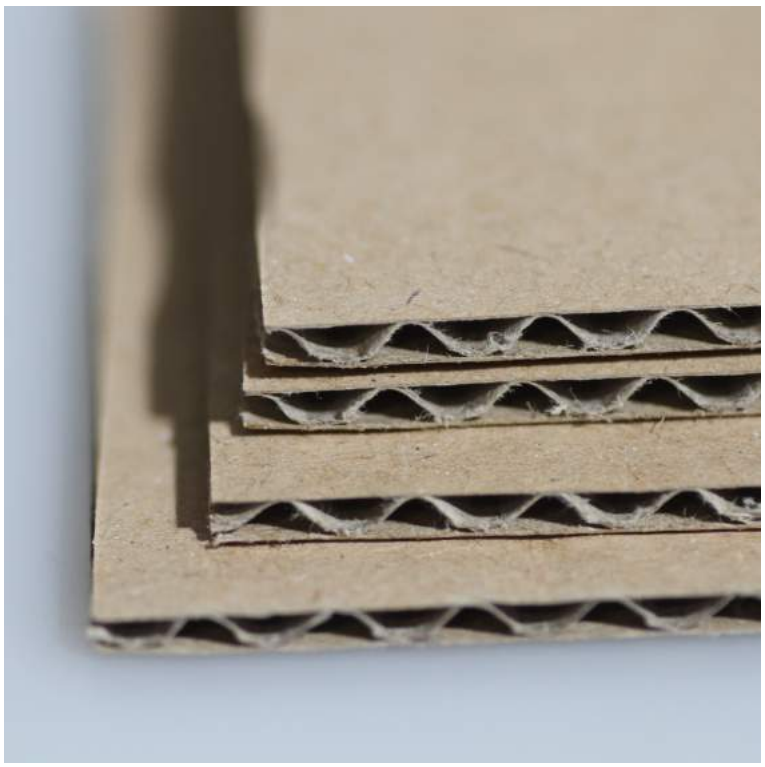

10 Cardboard, beds, tables & storage



Tab. 10 A: Cardboard, beds, tables & storage, general

Material group	Packaging
Name	Cardboard (GB, US); Karton (D)
Manufacturer	Monowell GmbH & Co. KG
Manufactured in	Germany (GER)
Use	Packing material for individual wrapping of the furniture

Tab. 10 B: Cardboard, beds, tables & storage, specific[30][31]

General description		
Certifications/Information	ISO 9001, ISO 50001, ISO 22000 DE, ISO 22000 EN, FSC	
Color	Brown	
Texture	matt	
Contents		
60 %	Recycled paper	
40 %	Primary raw material	
Life cycle assessment data „Kraftpapier" (GER)		10
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	5,888 MJ	
Use of freshwater resources (FW)	0,004899 m³	
Environmental impact per kg	**A1-A3**	
Global Warming Potential (GWP)	-0,8973 Kg CO_2-eqv.	
Environmental impact Transport, per 1000 kgkm		9
Production site: Germany/ZEITRAUM		
Truck - ca. 200 km	A4	10
Total non-renewable primary energy (PENRT)	172,12 MJ	
Use of freshwater resources (FW)	0,012106 m³	
Global Warming Potential (GWP)	12,822 Kg CO_2-eqv.	
Main raw material origin: Germany, Central Europe/Production site		
Truck - ca. 1500 km	A4	8
Total non-renewable primary energy (PENRT)	1812 MJ	
Use of freshwater resources (FW)	0,09582 m³	
Global Warming Potential (GWP)	134,535 Kg CO_2-eqv.	
Sustainability Assessment		
Longevity	Moderately durable/repairable (< 10 years)	4
Biological reproduction/ recycled material	60 %	6
Circulation potential	100 % (technological)	10

[30] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

[31] MATERIALARCHIV (2019) - Materialarchiv <http://www.materialarchiv.ch/app-tablet/#search> Accessed, on 03/01/2019

Socially compatible	Yes	10
Total average rating		**8,16**
Disposal note	Waste paper	

11 Polyester fleece

56 %

Tab. 11 A: Material data sheet, polyester fleece, general

Material group	Packaging
Name	Polyester fleece (GB); Polyestervlies (D)
Material abbreviation	PES
Manufactured in	Germany (GER)
Use	Packing material for protection

Tab. 11 B: Material data sheet, polyester fleece, specific[32][33]

General description		
Certifications/Information	n.a.	
Delivery form	Mats, wadding, etc.	
Texture	soft, fibrous	
Life cycle assessment data Comparative material for PE wadding (no data available) - PE nonwoven (GER)		3
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	22 MJ	
Use of freshwater resources (FW)	0,00252 m^3	
Environmental impact per kg	**A1-A3**	
Global Warming Potential (GWP)	0,73 Kg CO_2-eqv.	
Environmental impact Transport, per 1000 kgkm (approx. 0.5 kg/m²)		6,5
Production site: Germany/ZEITRAUM		
Truck - ca. 500 km	A4	10
Total non-renewable primary energy (PENRT)	430,3 MJ	
Use of freshwater resources (FW)	0,030265 m^3	
Global Warming Potential (GWP)	32,055 Kg CO_2-eqv.	
Main raw material origin: n.a./production site		3
n.a. - ø > 7000 km	A4	
Total non-renewable primary energy (PENRT)	8456 MJ	
Use of freshwater resources (FW)	0,44716 m^3	
Global Warming Potential (GWP)	627,83 Kg CO_2-eqv.	
Sustainability Assessment		
Longevity	Durable (10 - 20 years)	5
Biological reproduction/ recycled material	0 %	0
Circulation potential	100 % (technological)	10
Socially compatible	Yes	9
Total average rating		**5,58**

[32] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

[33] MATERIALARCHIV (2019) - Materialarchiv <http://www.materialarchiv.ch/app-tablet/#search> Accessed, on 03/01/2019

Disposal note	Recyclable waste	

12 PP strapping

61 %

Tab. 12 A: Material data sheet, PP strapping, general

Material group	Packaging
Name	TEWE® Polypropylene strapping
Material abbreviation	PP
Manufacturer	Teufelberger
Manufactured in	Austria (AT)
Use	Packing material for protection

Tab. 12 B: Material data sheet, PP strapping, specific[34][35]

General description		
Certifications/Information	ISO 9001, ISO 14001	
Life cycle assessment data Comparative material for PP (no data available) (GER)		5
Resource input per kg	**A1-A3**	
Total non-renewable primary energy (PENRT)	n.a.	
Use of freshwater resources (FW)	n.a.	
Environmental impact per kg	**A1-A3**	
Global Warming Potential (GWP)	n.a.	
Environmental impact Transport, per 1000 kgkm (approx. 0.5 kg/m²)		6,5
Production site: Austria/ZEITRAUM		
Truck - ca. 300 km	A4	10
Total non-renewable primary energy (PENRT)	362,4 MJ	
Use of freshwater resources (FW)	0,019164 m³	
Global Warming Potential (GWP)	26,907 Kg CO_2-eqv.	
Main raw material origin: n.a./production site		3
n.a. - ø > 7000 km	A4	
Total non-renewable primary energy (PENRT)	8456 MJ	
Use of freshwater resources (FW)	0,44716 m³	
Global Warming Potential (GWP)	627,83 Kg CO_2-eqv.	
Sustainability Assessment		
Longevity	Durable (10 - 20 years)	5
Biological reproduction/ recycled material	0 %	0
Circulation potential	100 % (technological)	10
Socially compatible	Yes	10
Total average rating		**6,08**
Disposal note	Recyclable waste	

[34] BMI 2021: Oekobaudat. Database <https://www.oekobaudat.de/no_cache/en/database/search.html> Accessed, on 10/27/2021

[35] MATERIALARCHIV (2019) - Materialarchiv <http://www.materialarchiv.ch/app-tablet/#search> Accessed, on 03/01/2019

Information on all materials used by ZEITRAUM
can be found in our material library at:

www.zeitraum-moebel.com

Important note: Our Furniture Footprint product data sheets have no scientific claim and are to be understood as a guide for our customers and us. All data are marked with corresponding source information. The contents of our Furniture Footprint product database have been compiled with the utmost care. However, we do not guarantee the accuracy, completeness and timeliness of the content, so we do not assume any liability for incorrect, outdated or incomplete information.